




Type: **GKHM 560-CEI.183.6NA IE ULH**
Module
Part no.: N88-56708



Curve:

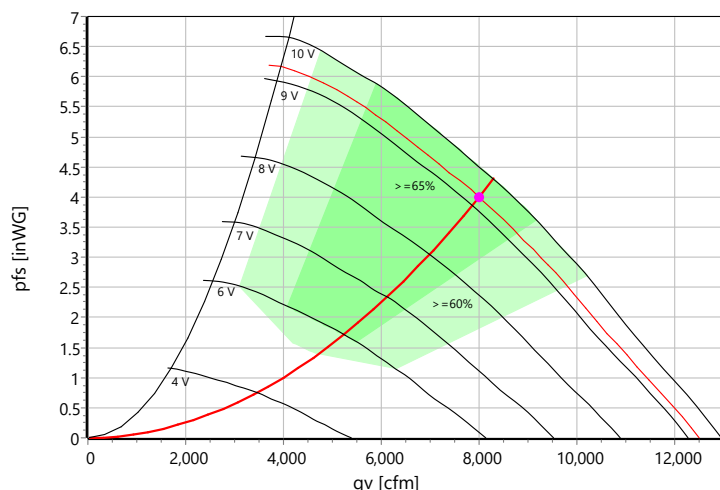

ρ : 1.15 kg/m³; Data @ 400 V


Nominal Data:

U [V]	f [Hz]	Data @ [V]	P _{ed} [kW]	I _N [A]	n _N [r/min]	t _R [°C]	k ₁₀ [m ² s/h]	Eff.-Rating	IP	m [kg]
3~380-480	50/60	400	6.5	9.6	1920	-25 .. +40	283	IE4	IP 42	73
		460		8.3						


Sound Data:

Frequency	Σ	63Hz	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Distances	1 m	4 m
LwA(A,in) [dB(A)]	82	44	70	74	72	76	76	74	72	LpA(A,in) [dB(A)]	75	65
LwA(A,out) [dB(A)]	88	52	76	78	80	82	82	80	76	LpA(A,out) [dB(A)]	81	71

Wiring Diagram:

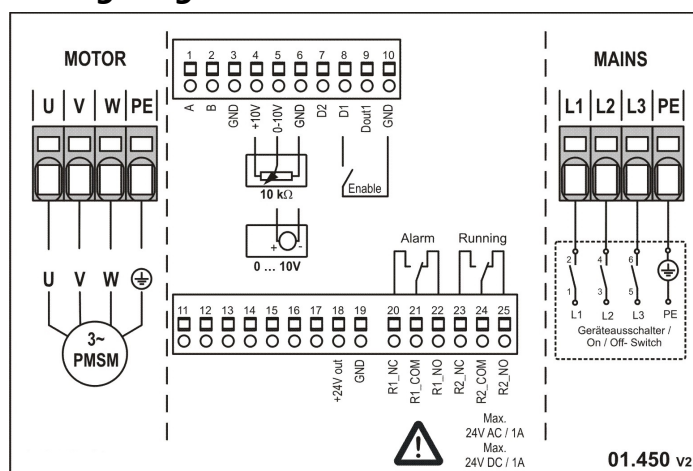

Drawing:

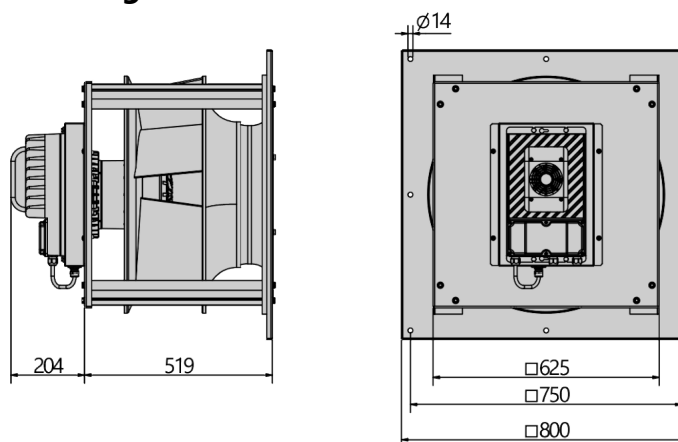



Attention: Start-up times up to ~ 20 - 60 sec. depending on motor-impeller combination, motor load and number of operation.
Please note during project planning (e.g. for condenser units in refrigeration circuits)!



Type: **GKHM 560-CEI.183.6NA IE ULH**

Module

Part no.: N88-56708

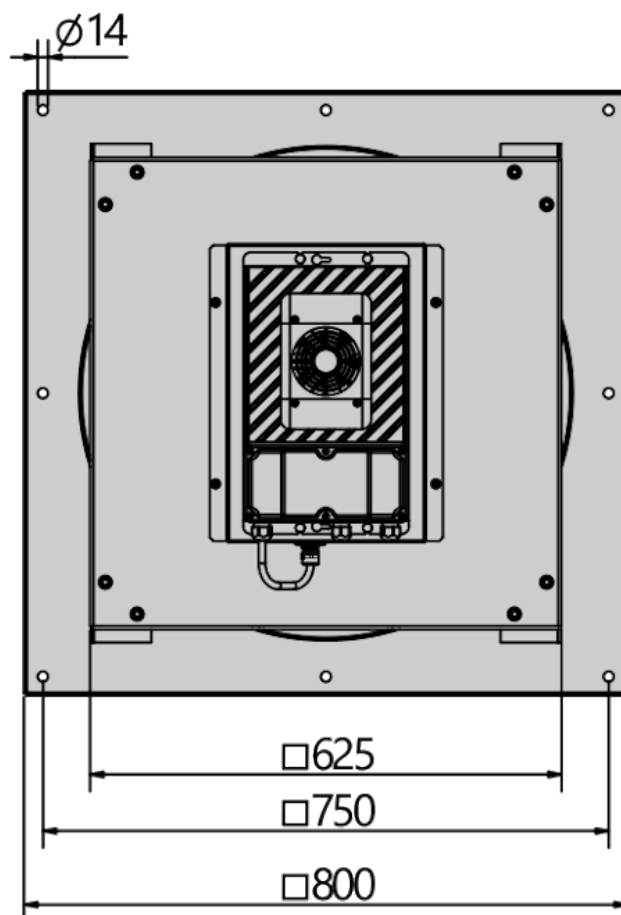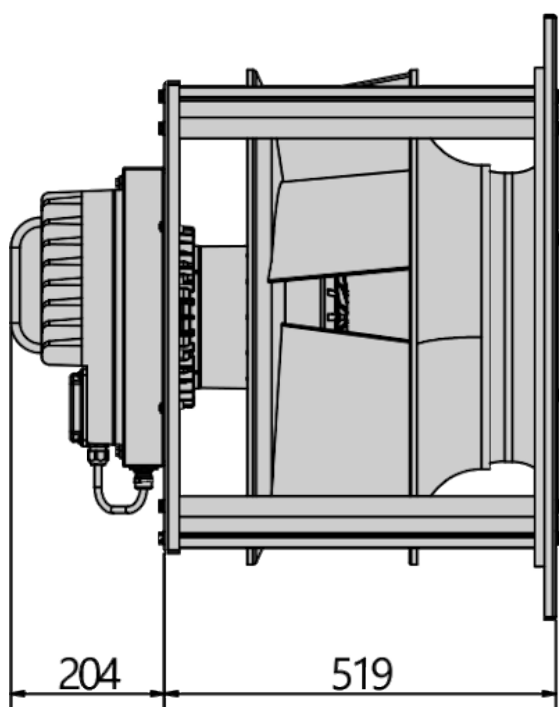




Type: **GKHM 560-CEI.183.6NA IE ULH**

Module

Part no.: N88-56708

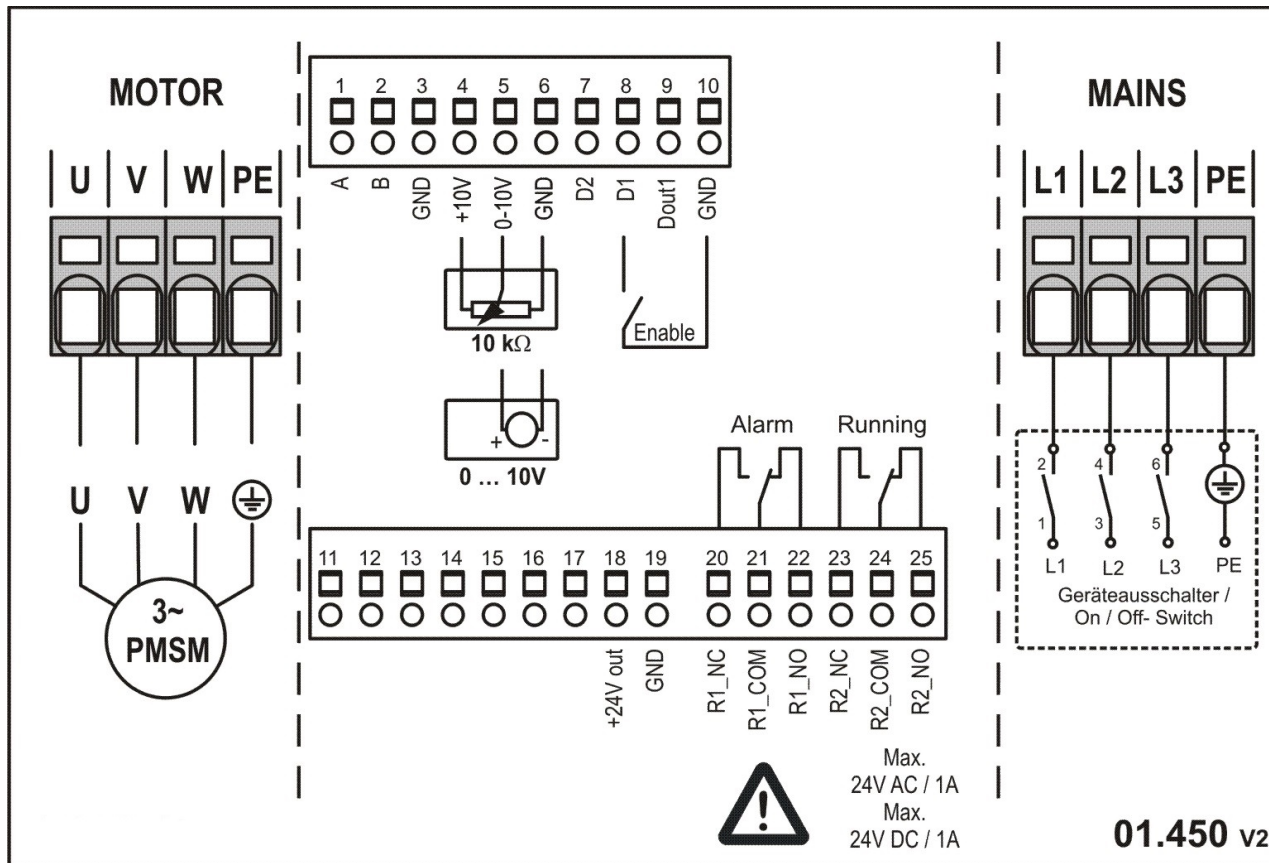




Type: **GKHM 560-CEI.183.6NA IE ULH**

Module


Part no.: N88-56708



stat. Efficiency

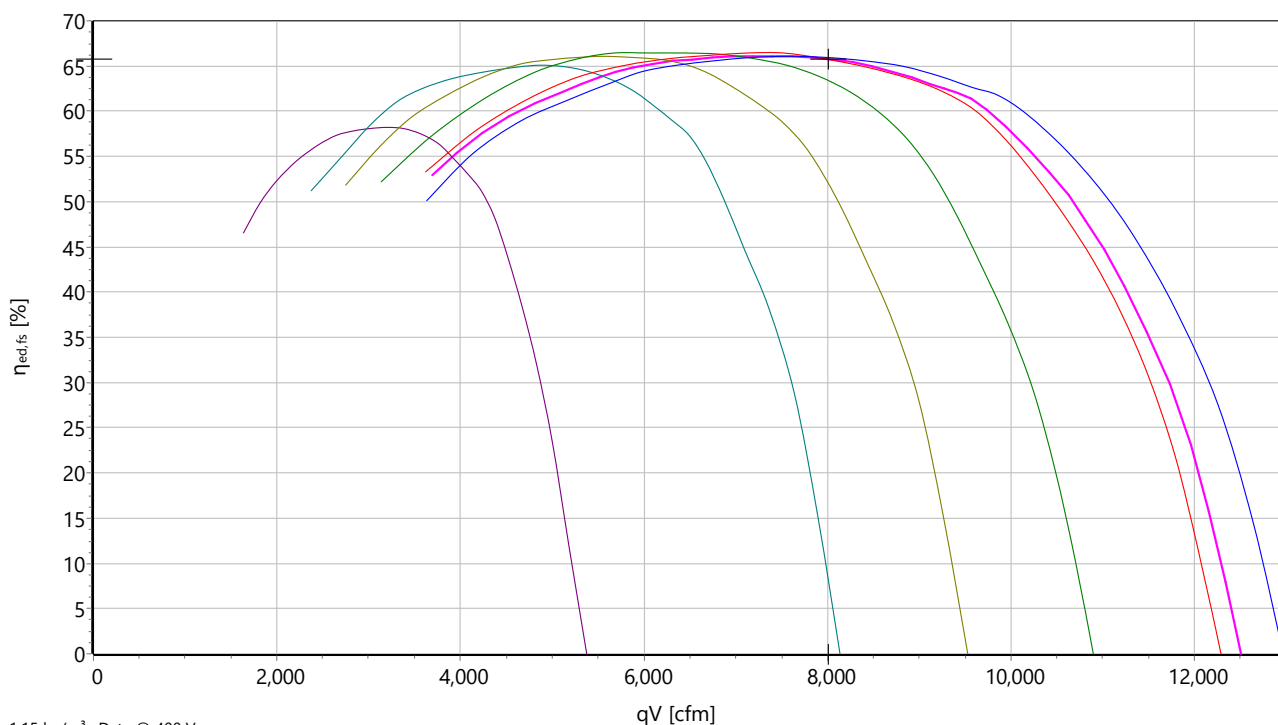

Input power

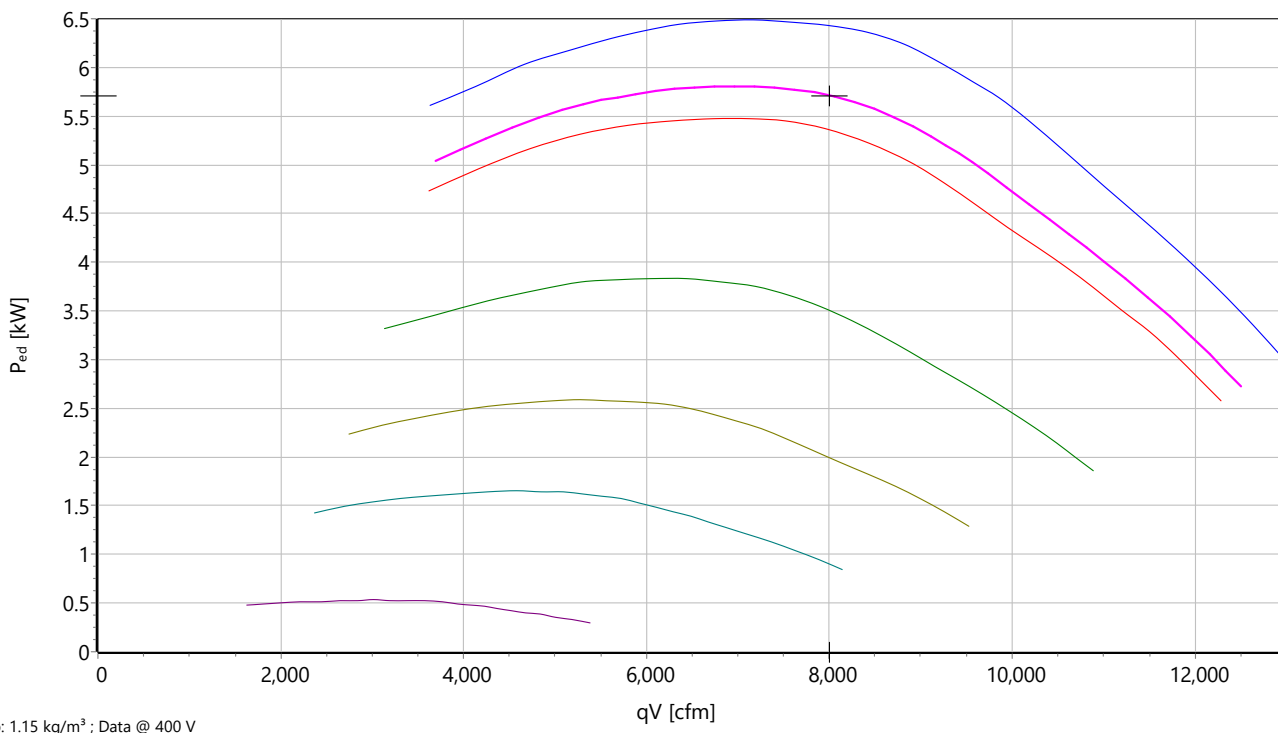




Type: **GKHM 560-CEI.183.6NA IE ULH**

Module


Part no.: N88-56708



Sound power

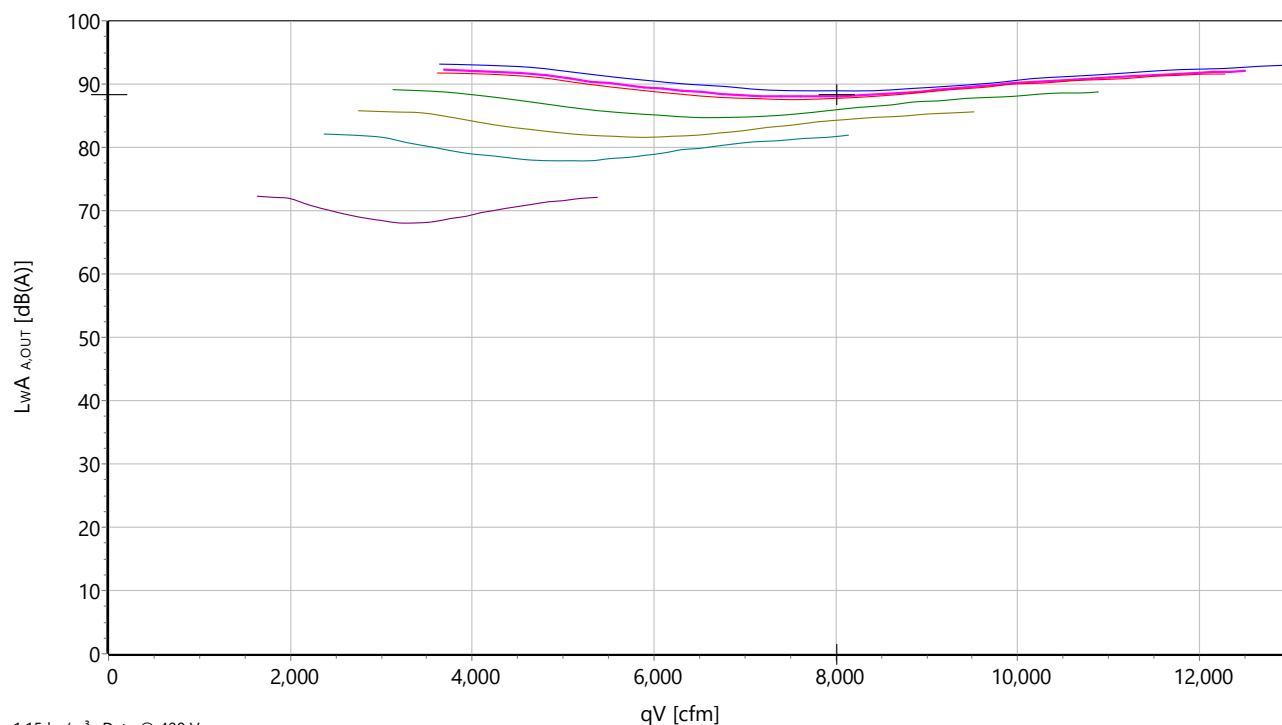

Speed

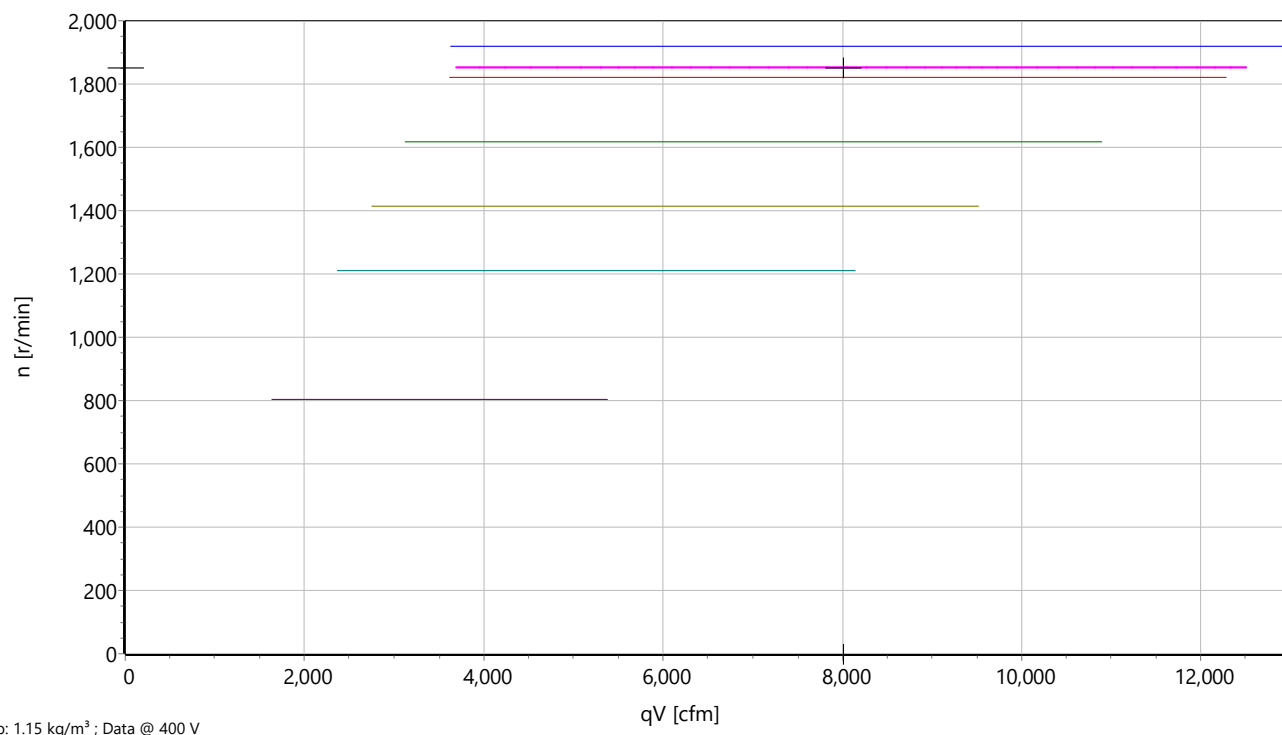




Type: **GKHM 560-CEI.183.6NA IE ULH**

Module


Part no.: N88-56708



LwA(in)

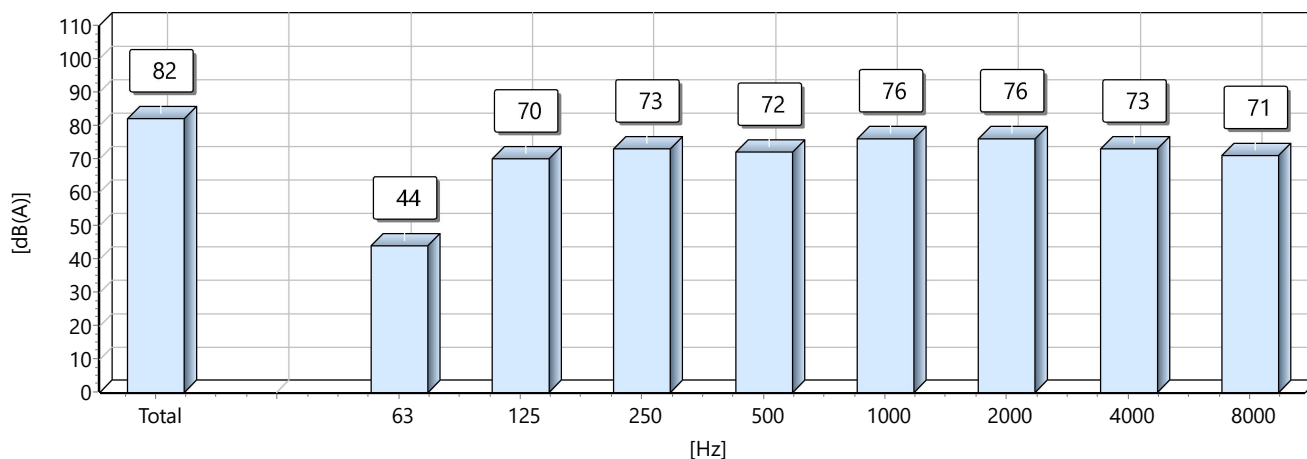

LwA(out)

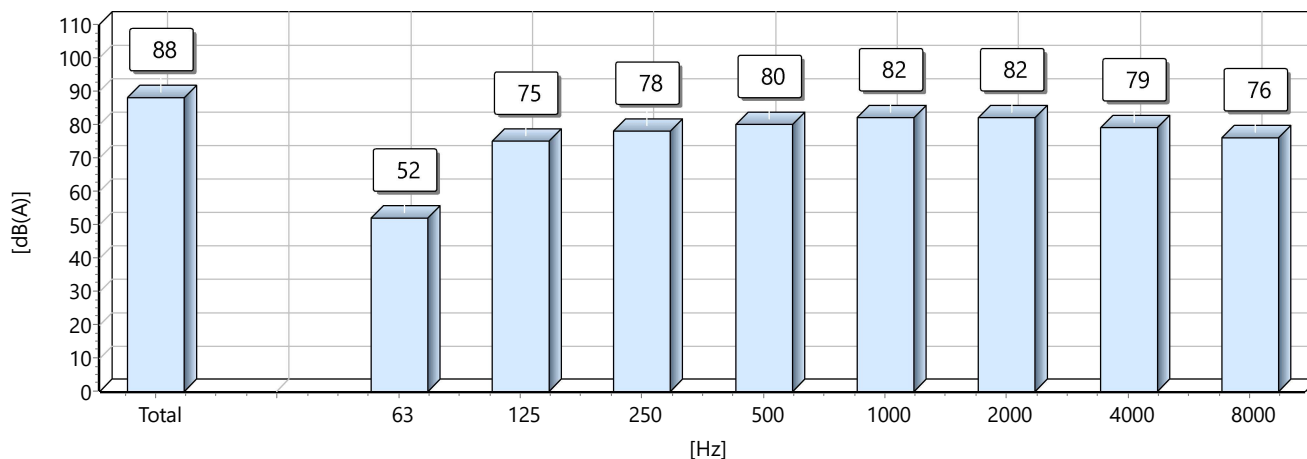

GKH...ULH - Plug Fan

with EC-Motor and external electronic

- pressure orientated high performance impeller
- with Ultra Low Harmonic Technology
- speed infinitely adjustable
- fast start-up (due to pre-configured system)
- different mechanical configurations available
- maintenance free operation through lifetime lubricated ball bearings
- in compliance with ERP directive (327/2011)
- high operating efficiency due to EC drives
- constant high degree of efficiency (even under partial load)



Description:

Rosenberg EC-Plug fans combined with electronically commutated motors (EC-motors), form a very compact, efficient and optimized fan unit. They impress with low installation depth and a simple installation. Fast start-up is ensured because of well-integrated components.

Applications:

Air Handling Units

Mechanical Configuration:

Plug fans, in dependence of the fan type, are available in different mechanical designs. Mounting either with horizontal or vertical motor shaft.

_KHR, RRE	= Motorized Impeller (Inlet Cone Accessory)
_KHM, RRM	= Fan Module type "Module" cone and supporting frame included
_KHS	= Fan Module type "Spider" cone and supporting frame included
_KHB	= Fan Module type "Mounting Stand" cone and supporting frame included

Impeller:

CEB-Types

Impeller made of aluminum (AlMg3) with 7 backward curved blades and efficiency optimized circumferential diffusor. Sound optimized. Pressure orientated behaviour.

CEI-Types

Impeller made of aluminum (AlMg3) with 5 backward curved, profiled blades and efficiency optimized circumferential diffusor. Sound optimized design. Volumeflow orientated behaviour.

Product range: 450, 500, 560 and 630 mm.

Motors:

The EC motors used are characterized by a very high degree of efficiency, even in partial load ranges, as well as good controlling and regulation behavior. They are easy to connect, individually preconfigured, compact in design and show a high power density. The implementation of additional functions (e.g. air flow and pressure control) is possible. All motors are speed controllable in the range 0-100%.

Integrated Motor Protection:

The motor protection is integrated with Rosenberg EC motors. All necessary parameters, such as temperature, blocked rotor, over and undervoltage and power are continuously checked and monitored via an intelligent failure management.

Ultra Low Harmonic Technology:

A active 3~ PFC (Power Factor Correction) in the Powersupply secure a high Powerfactor (low input current) and a low harmonic current. The Power Factor is typically above 0,99 and the THDC is smaller then 3% in a wide power range.

Electrical connection:

1~phase Variants:

The electrical connection is made via cables from the motor.

3~phase Variants:

The electrical connection is made via cable glands from the integrated terminal box of the motor.

Air volume control:

For more information see accessories.

Infinitely variable controlling:

via Potentiometer or external set point

Constant-Air Flow-Control:

via pressure controller in combination with air flow measuring points integrated in the inlet cone

Constant-Pressure-Control:

via pressure controller

Constant-Temperature-Control:

via temperature controller

Important notes:

Air performance curves:

The air performance curves have been established using the intake test method in the test chamber according to DIN EN ISO 5801. They show pressure increase as a function of the volume flow. Performance curves were recorded in installation type A.

Sound levels:

The tests and their performance curves were conducted according to DIN 45635 part 38 or. ISO 133347-3 and DIN EN ISO 3744/ 3745 in accordance with the envelope surface method.

Erp-Information:

Rosenberg fans have a specific (pressure-) ratio < 1,05 (pressure < 5000 Pa).

Service life:

For maximum service life of Rosenberg products please beware of the maintenance hints on the manual for each product type.

Recycling and disposal:

For recycling and disposal of Rosenberg products comply with applicable locally requirements and regulations.