




- Steep pressure-volume-performance curve
- 100% speed controllable through auto transformers
- Easy air volume control via large range of control products based on pressure and temperature
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P <sub>1</sub> [kW]	I <sub>N</sub> [A]	n [min <sup>-1</sup> ]	t <sub>R</sub> [°F]	t <sub>R</sub> [°C]	C [μF]	ΔI [%]	I <sub>A</sub> /I <sub>N</sub>	▲	★	I [kg]
DRAD 315-4	3~460Y	60	A	6.20	9.70	1630	122	50	-	10	4.5	54	01.005	60
DRAD 315-4	3~230D	60	B	5.80	17.0	1570	122	50	-	8	4.5	54	01.006	60
DRAD 315-4	3~400Y	50	C	4.50	8.70	1370	140	60	-	-	4.3	54	01.005	60

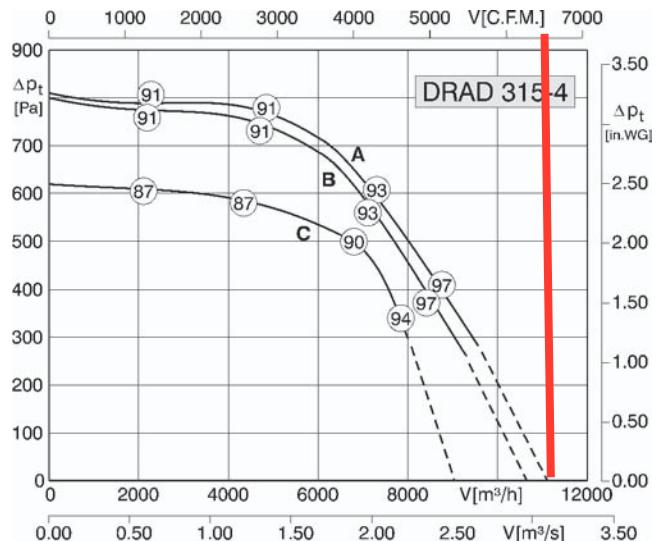