




- compact and space saving design
- 100% speed controllable through auto transformers
- Easy air volume control via large range of control products based on pressure and temperature
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P_1 [kW]	I_N [A]	n [min^{-1}]	t_R [°F]	t_R [°C]	C [μF]	ΔI [%]	I_A/I_N	Δ	*	\bar{I} [kg]
DRAD 251-4 L	3~460Y	60	A	1.50	2.60	1550	120	50	-	-	3.7	54	01.005	24
DRAD 251-4 L	3~230Δ	60	B	1.40	4.20	1490	120	50	-	-	3.7	54	01.006	24
DRAD 251-4 L	3~400Y	50	C	1.10	2.50	1300	120	50	-	-	3.5	54	01.005	24

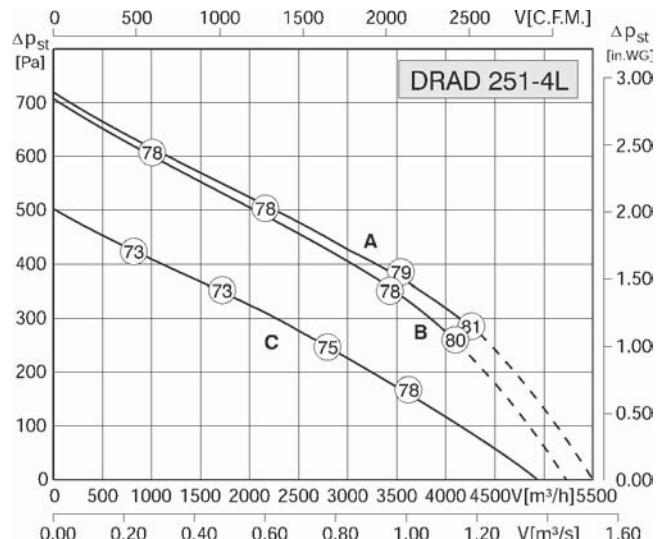