



RREV8 250x50R

Q13-A2-1



DATA SHEET

release. 0 - Revision 03-2017

Voltage	Frequency	Input Power	Input Current	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	m³/h	RPM	dBA		Min/Max
230	50/60	266	1,19	1975	3390		R	-20°C / +60°C
230	50/60			1162 CFM				-4°F / 140°F



dBA : free blowing

ErP 2013

OK


ErP 2015

OK

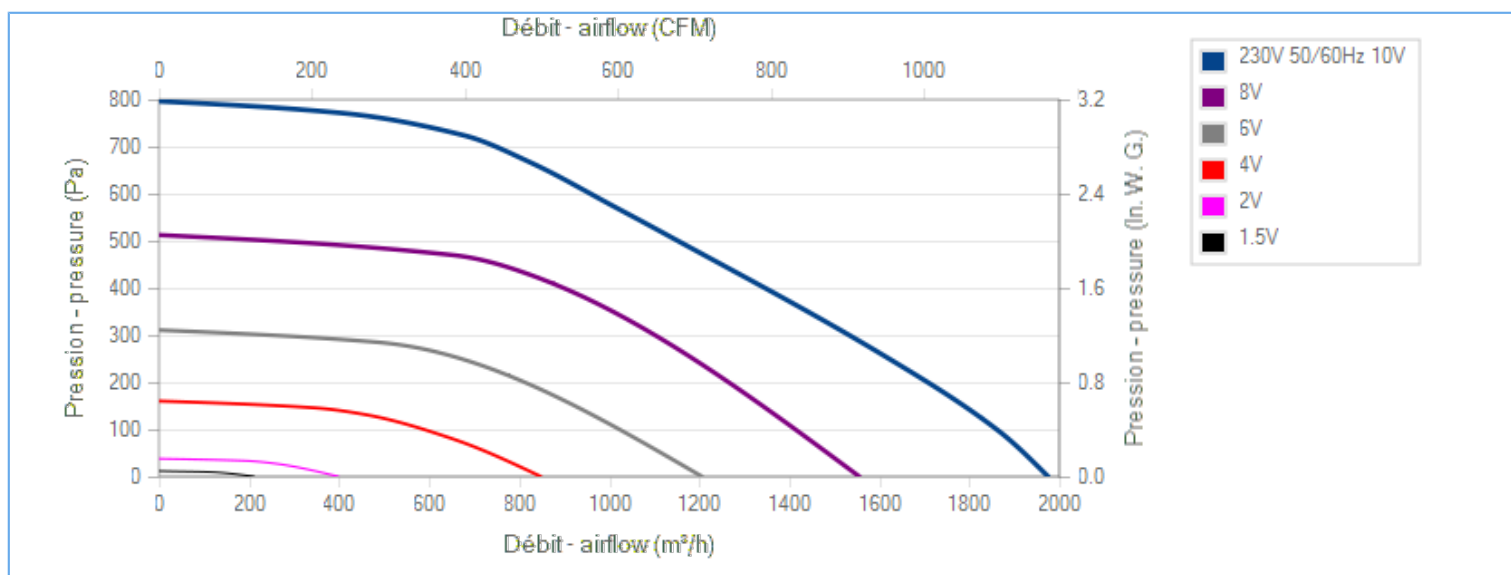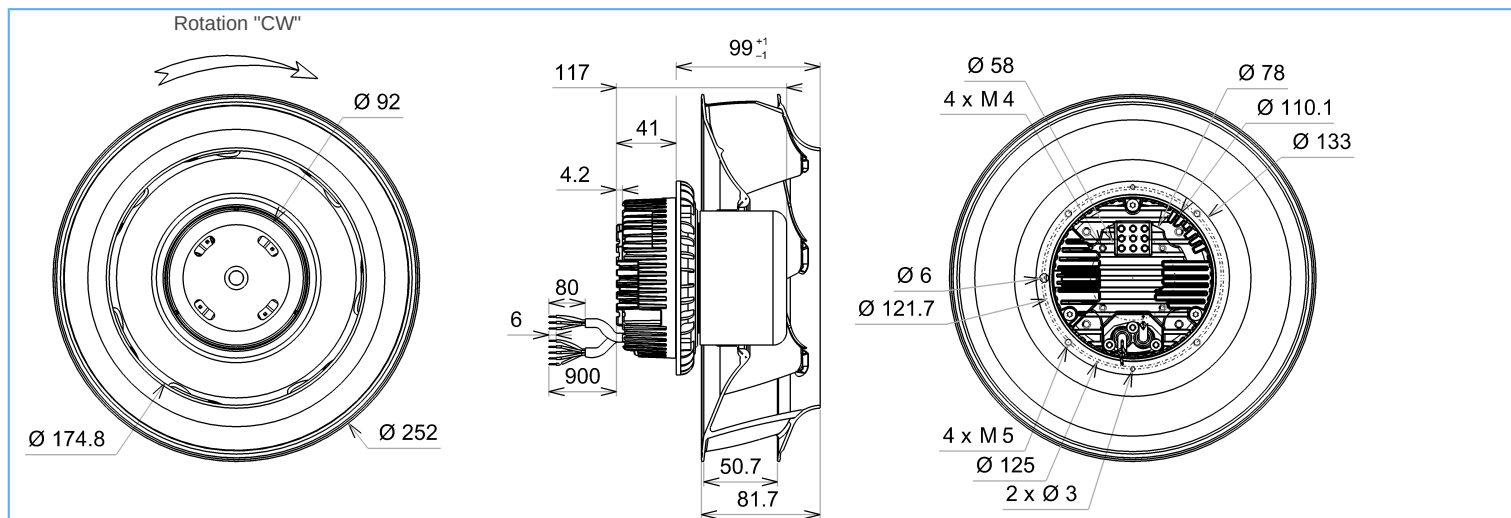

Description

- .Weight : 3,0 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP54 protection depending on installation and position as per EN60034-5
- .G2.5 balancing
- .PA 6/6 UL 94 V-0 plastic impeller

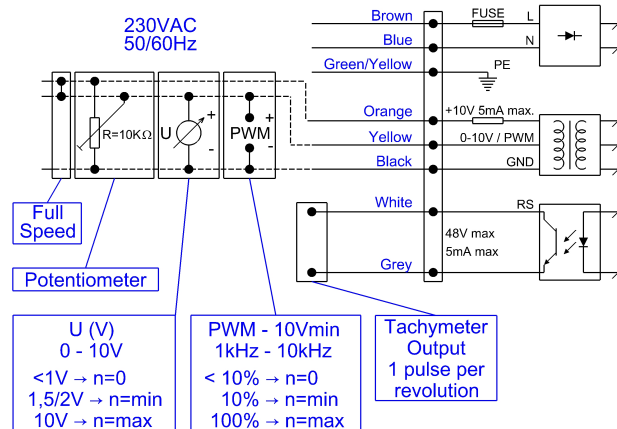



RREV8 250x50R

Q13-A2-1

DATA SHEET

release. 0 - Revision 03-2017

Data in accordance
to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,300	kW ⁽¹⁾
Airflow	1015	m ³ /h ⁽¹⁾
Pressure	571	Pa ⁽¹⁾
Rotation speed	3204	RPM ⁽¹⁾

(1) at optimal efficiency point

	Actual	Request 2013	Request 2015
Overall efficiency (η)	60,3	42	46
Efficiency grade	76	58	62
Installation category	A		
Efficiency category	static		
Variable speed drive	Yes		
Specific ratio	1,00		

Designed for regular application according ErP
directive EU 2009/125/EC

Accessories



16234

21360

Measurement setup

16234

Documents

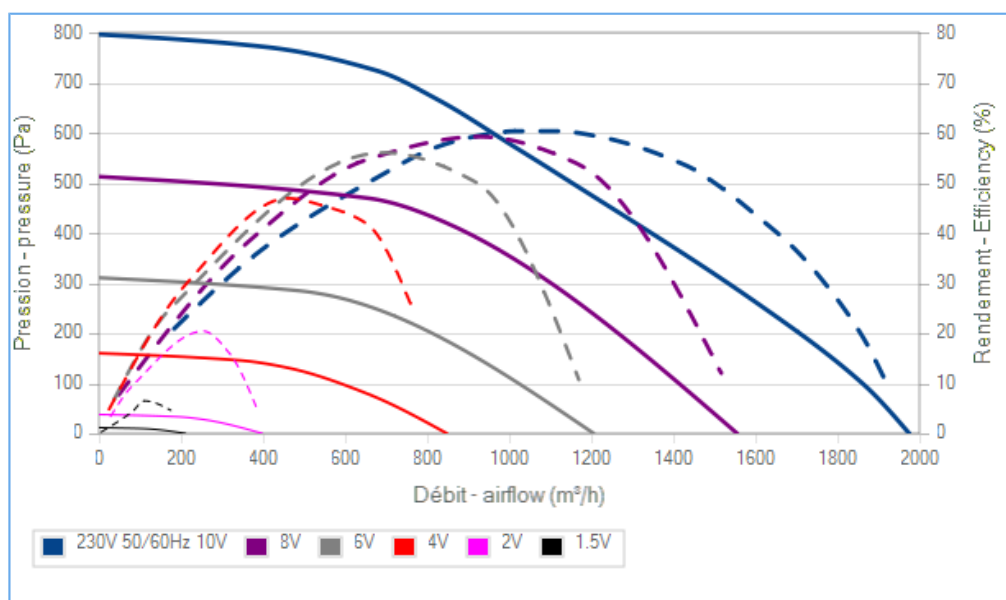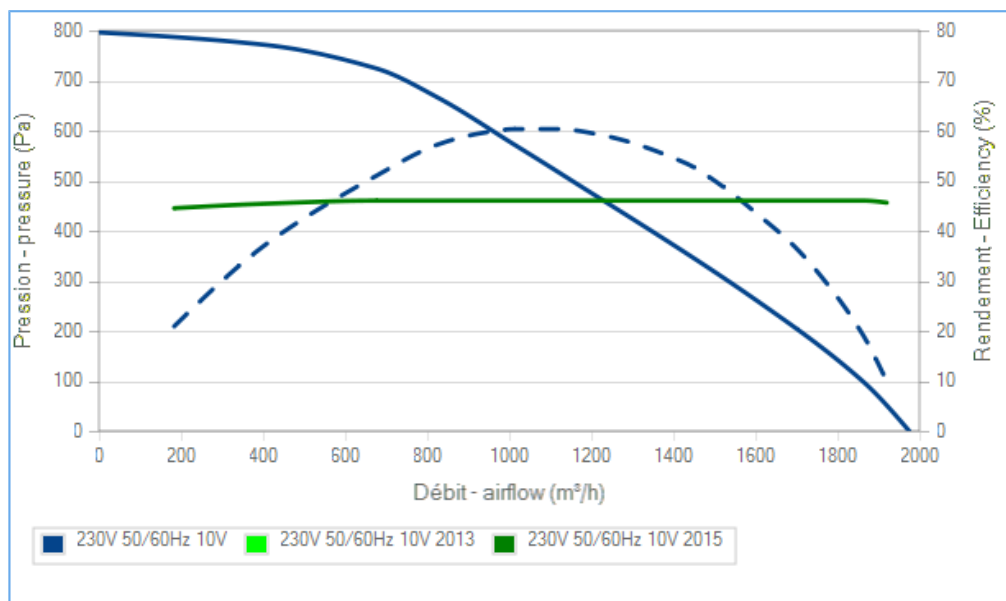Manuel d'utilisation
www.ecofit.com/site/normesOperating and recycling manual
www.ecofit.com/anglais/normesLa courbe de rendement intègre le facteur de compensation de charge partielle du règlement (UE) n°327/2011
The efficiency curve includes part load compensation factor of regulation (EU) n°327/2011