




**UNO\_G80-560-G.6IF (3x400V)**

07.08.2013

**Unobox**  
With EC-motor

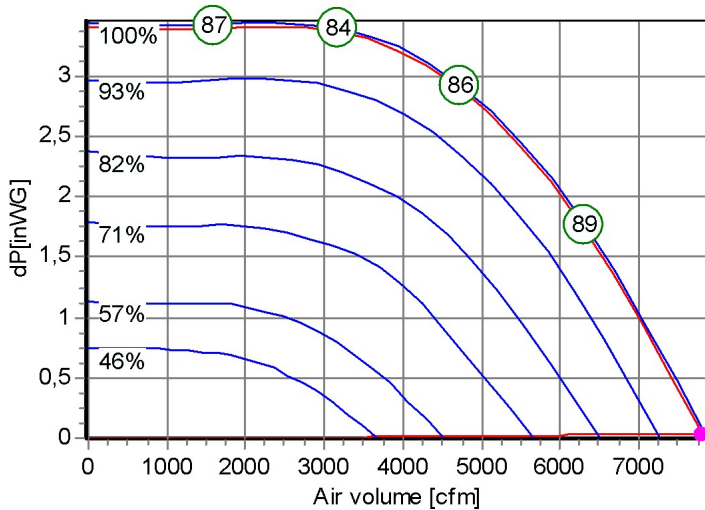

**Requested operating point**


Vol[cfm]	7797
dp[inWG]	0,04

**Operating data**

Vol[cfm]	7797
dp[inWG]	0,04
dp(dyn)[inWG]	0,04
n[%]	100
P[kW]	1,92
I[A]	2,99
n[1/min]	1394
eta[%]	0,0
Lw6[dBA]	88,9

**Nominal data**

Art.	F15-56012
U[V]	3~380-480
f[Hz]	50/60
P[kW]	2.8
I[A]	4.3@400V
n[1/min]	1400
C[μF]	--
tR[°C]	50
Pst min[Pa]	--
Delta I[%]	--
Ia/In	--
Weight [kg]	83
Connection	01.390

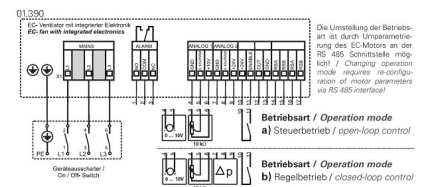

**Octaves [dBA]**

	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Total
LwA6	69	78	81	86	80	76	67	88,9
LwA5	66	78	79	79	77	74	65	84,9
LwA2	69	68	58	57	55	51	45	71,9

LwA6: Free outlet sound power level

LwA5: Free inlet sound power level

LwA2: Casing radiated sound power level