



2RREu45 250x56R

P/N Z27-03

Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature	ErP 2013	ErP 2015
V	Hz	Wa	A	µF	m³/h	RPM	dBA	↻	Min / Max		
230	50	190	0,83	6,0	1 540	2 700	74	R	-40°C / +60°C	NOK	NOK
230	60	259	1,13	6,0	1 745	3 030	77	R	-40°C / +70°C		
230	50				906 CFM				-40°F / +140°F		
230	50				1027 CFM				-40°F / +158°F		



dBa : free let out

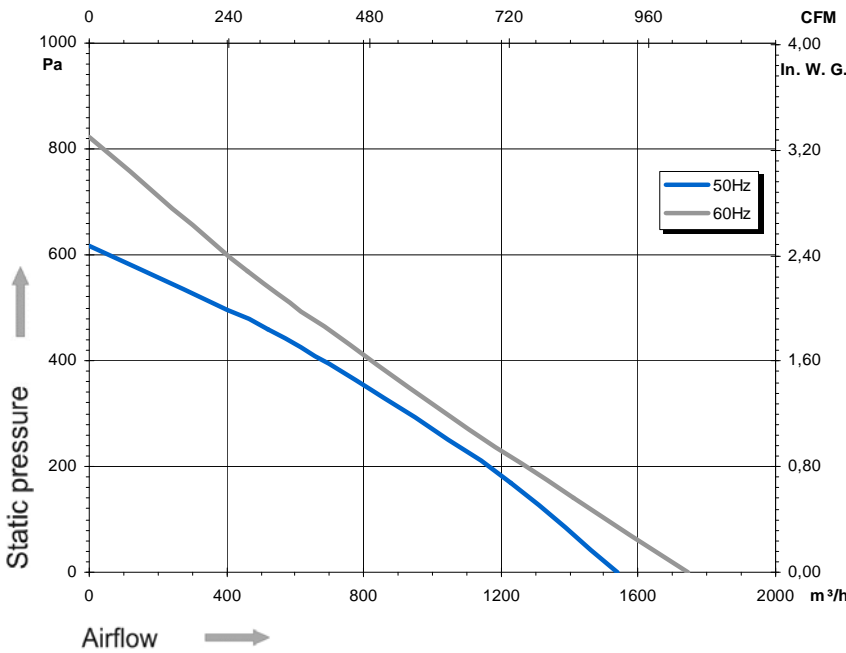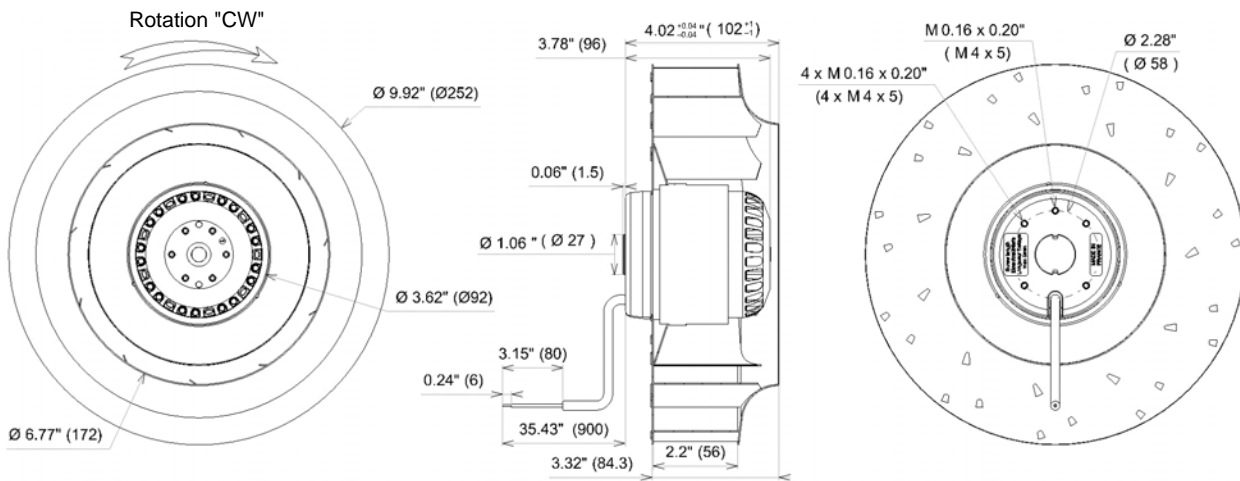

- Weight : 3,4 Kg
- Ball bearing
- Class F, thermally protected
- IP44 protection depending on installation and position as per EN60034-5
- G2.5 balancing
- Rotor : black paint
- Galvanized steel impeller
- UL approved motor

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.



UL2111 (XEW2,8)
N° File E135223
2RS945



Capacitor for 50Hz	Capacitor for 60Hz	Inlet cone
19221	19221	16114

